Advanced Testing for Innovative Design





Norman Asbjornson Innovation Center





Norman Asbjornson Innovation Center

The Norman Asbjornson Innovation Center (NAIC) solidifies AAON as the technological leader in high performance HVAC equipment. Since the groundbreaking of the research and development lab in February 2016, construction crews have been working round-the-clock on bringing this vision to life — with an expected completion and official opening in Fall 2018.

The NAIC is a 65 foot tall 134,000 square foot laboratory marvel able to measure both acoustics and thermal performance. A few features of the lab include supply, return, and outside sound testing at actual load conditions, testing of up to a 300 ton air conditioning system, testing of up to a 540 ton chiller system, and 80 million Btu of gas heating test capacity. Environmental application testing capabilities include -20°F to 140°F testing conditions, up to 8 inches per hour rain testing, up to 2 inches per hour snow testing, and up to 50 mph wind testing.



Water-Source Heat Pump Test Chamber Interior

Test Chambers

The Norman Asbjornson Innovation Center consists of ten testing chambers allowing AAON to meet and maintain AHRI (Air-Conditioning Heating and Refrigeration Institute) and DOE (Department of Energy) certification, and solidifying the company's industry position as a technological leader in the manufacturing of HVAC equipment. This is the only lab in the world able to measure the supply, return, and outside sound under actual load conditions. The 540 ton sound and psychrometric test chamber is isolated into three different sections for supply, return, and outside sound measurement. Furthermore, the testing chamber is able to measure the efficiency by which energy is converted into heating, cooling, or air movement.

NAIC Facility Construction Facts

Basic Information		
Building Info:	Location – AAON Headquaters, Tulsa, OK	
	Three Stories — 65 ft Tall	
	75,000 ft ² Footprint — 327 ft (North & South) by 230 ft (East & West)	
	Facility Chilled Water Capacity = 960 tons	
	Facility Electrical Capacity = 7.25 Megawatts	

Number of Man Hours for Construction
277,000+
Number of Workers

Number of Workers involved in the Construction	
200+ workers	

Expected number of AAON lab employees who will work in the Norman Asbjornson Innovation Center		
48 by the end of 2018	80 by the end of 2022	

Estimated Materials		
Reinforcing Steel	278 tons (556,000 lbs)	
Structural Steel	1,224 tons	
Concrete	6,520 cubic yards	
Imported Select Fill for Building Pad	8,000 cubic yards	
Imported Rock Base Under 1st Floor	5,600 tons	

Factory Witness Testing

Factory witness testing is now available to order for all test chambers. Watch your units tested at the real world conditions of your application or at AHRI/ASHRAE/ISO test standard conditions. See firsthand the capabilities of AAON equipment in the beautifully designed lab facilities of the Norman Asbjornson Innovation Center.

Benefits of NAIC Testing

- Verify Capacity and Efficiency Before Equipment Installation
- Verify Acoustical Performance at Actual Application Conditions
- Eliminate Risk and Costly Job Site Modifications
- Save Time at Startup



Witness Testing Conference Room

NAIC Testing Scheduling

Scheduling of witness testing is subject to the NAIC test chamber availability and is independent of the AAON production schedule. AAON unit testing dates can be scheduled after an order is entered. For witness testing, any punch list items or other work required by witnesses will require the unit to go back to AAON production for rework.




540 ton Test Chamber Interior

Sound and Airflow Testing + Optional Performance Testing

Sound and airflow testing, with optional simultaneous performance testing, is available in the 540 ton test chamber. Installation of units into the three-room sound and performance chamber includes ducting through the floor of the outdoor room into the discharge and inlet rooms with necessary sealing to prevent air leakage. During the tests, airflow will be measured between the discharge room and inlet room. Inlet, outlet, and radiated sound will be measured simultaneously. Sound power measurements will be presented in both 1/3 octaves and full octaves.

Product Showcase Room

AAON products are beautifully displayed in a dedicated Product Showcase Room within the NAIC. You can tour the latest AAON equipment and HVAC designs to see what makes AAON stand out from the competition. Nearby, a conference room is available for meetings and use during witness testing.



Product Showcase Room



20 ton Cooling Capacity Over/Under Psychrometric Chamber - North		
Indoor	Cooling Cap. (tons)	20
	Test Airflow (cfm)	10,000
	DB Range (°F)	40-130
Room	DB Stability (°F)	± 0.2 °F DB
	RH Range (%)	10-80
	RH Stability	± 0.9 °FWB
Outdoor Room	Cooling Cap. (tons)	26
	Test Airflow (cfm)	20,000
	Code Tester Stability (%)	±1
	DB Range (°F)	-20-130
	DB Stability (°F)	±0.2
	RH Range (%)	10-90
	RH Stability	± 0.9 °F WB
Dower	230V 3Ph Max Amps	470
Power	460V 3Ph Max Amps	235
Indoor/Outdoor chambers may be used as two separate 10 ton testing chambers		


20 ton Cooling Capacity Over/Under Psychrometric Chamber - South		
Indoor	Cooling Cap. (tons)	20
	Test Airflow (cfm)	10,000
	DB Range (°F)	40-130
Room	DB Stability (°F)	± 0.2 °F DB
	RH Range (%)	10-80
	RH Stability	± 0.9 °F WB
Outdoor Room	Cooling Cap. (tons)	26
	Test Airflow (cfm)	20,000
	Code Tester Stability (%)	±1
	DB Range (°F)	-20-130
	DB Stability (°F)	±0.2
	RH Range (%)	10-90
	RH Stability	± 0.9 °F WB
Power	230V 3Ph Max Amps	470
	460V 3Ph Max Amps	235
Indoor/Outdoor chambers may be used as two separate 10 ton testing chambers		


Psychronietric Chambe	100 ton Cooling Capacity Over/Under Psychrometric Chamber	
Cooling Cap. (tons)	100	
Test Airflow (cfm)	50,000	
DB Range (°F)	40-130	
DB Stability (°F)	± 0.2 °F DB	
RH Range (%)	10-80	
RH Stability	± 0.9 °F WB	
Cooling Cap. (tons)	130	
Test Airflow (cfm)	100,000	
Code Tester Stability (%)	±1	
DB Range (°F)	-20-130	
DB Stability (°F)	± 0.2	
RH Range (%)	10-90	
RH Stability	± 0.9 °F WB	
230V 3Ph Max Amps	783	
460V 3Ph Max Amps	391	
	Cooling Cap. (tons) Test Airflow (cfm) DB Range (°F) DB Stability (°F) RH Range (%) RH Stability Cooling Cap. (tons) Test Airflow (cfm) Code Tester Stability (%) DB Range (°F) DB Stability (°F) RH Range (%) RH Stability 230V 3Ph Max Amps	

50 ton Cooling Capacity Over/Under Psychrometric Chamber			
	Cooling Cap. (tons)	50	
	Test Airflow (cfm)	25,000	
Indoor	DB Range (°F)	40-130	
Room	DB Stability (°F)	± 0.2 °F DB	
	RH Range (%)	10-80	
	RH Stability	± 0.9 °FWB	
Outdoor	Cooling Cap. (tons)	65	
	Test Airflow (cfm)	50,000	
	Code Tester Stability (%)	±1	
Room	DB Range (°F)	0-130	
	DB Stability (°F)	±0.2	
	RH Range (%)	10-90	
	RH Stability	±0.9°FWB	
Power	230V 3Ph Max Amps	627	
rower	460V 3Ph Max Amps	300	

Water-Source Heat Pump Psychrometric Chamber		
Indoor Room	Capacity (tons)	12
	Test Airflow (cfm)	6,000
	DB Range (°F)	40-120
	DB Stability (°F)	± 0.2 °F DB
	RH Range (%)	30-80
	RH Stability	± 0.9 °F WB
Dayyar	230V 3Ph Max Amps	200
Power	460V 3Ph Max Amps	200
	GPM	50
Chilled Water	Capacity (tons)	12
	Temp. Range (°F)	35-120
Larger Psychrometric Chambers will be used to test water-source heat pump units larger than 12 tons.		

540 ton Chiller Capacity/300 ton Cooling Capacity Over/Under Sound and Psychrometric Chamber		
	Cooling Cap. (tons)	300
	Test Airflow (cfm)	100,000
Indoor	DB Range (°F)	50-100
Room	DB Stability (°F)	± 0.2 °F DB
	RH Range (%)	10-80
	RH Stability	±1%
Outdoor Room	Cooling Cap. (tons)	600
	Test Airflow (cfm)	480,000
	Code Tester Stability (%)	±1
	DB Range (°F)	50-130
	DB Stability (°F)	±1
	RH Range (%)	10-90
	RH Stability	± 1%
Daywar	230V 3Ph Max Amps	1,200
Power	460V 3Ph Max Amps	800
	GPM	1,300
Chilled Water	Capacity (tons)	540
	Temp. Range (°F)	45-65
Gas Heating Capacity	Max Capacity (Btu)	8 million

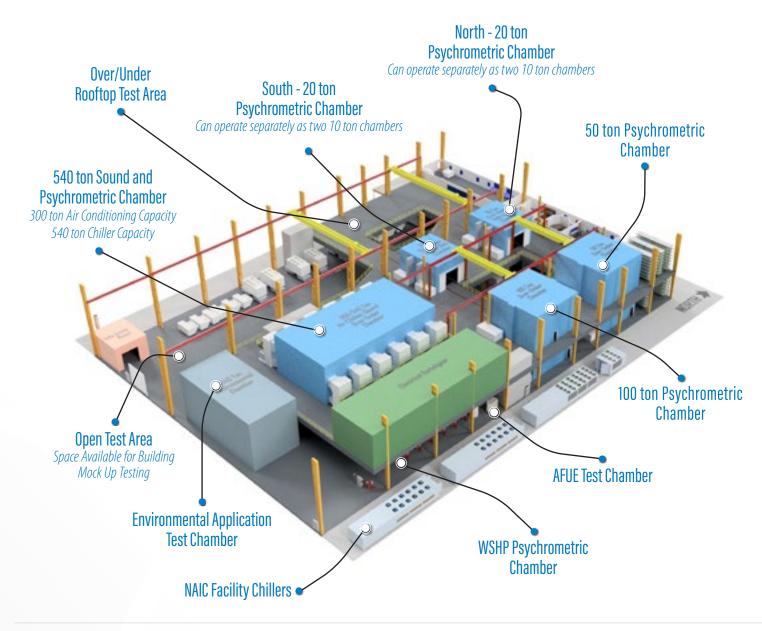

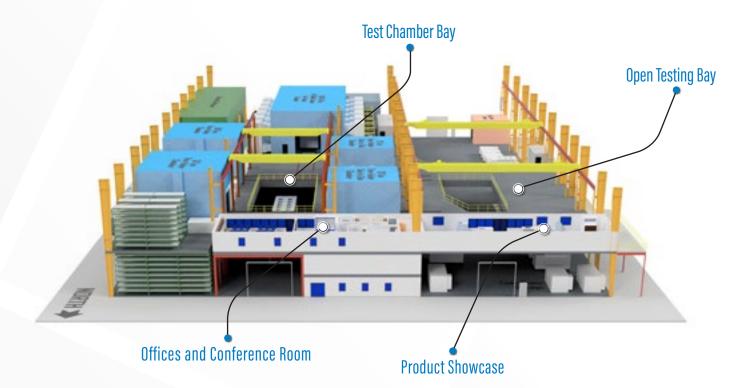

Chamber Instrumentation

The instrumentation in the psychrometric chambers is capable of reading temperature, humidity, pressures, airflow, water flow, fan speed, air velocity, voltage, current, frequency, power factor, power, etc. From these values, unit performance and other valuable information is collected. The integrated data acquisition system in the chambers is capable of reading, processing, and saving over 93,000 points of data per minute. The chamber data combined with the data gathered from floor testing creates over 120,000 different data points in one minute of testing.


Environmental Test Chambers

AFUE and Low Temperature Test Chamber			
Chamber Size	18 ft x 18 ft x 14 ft l	nigh	
Outside Temperature Test Range	-20 °F to 140 °F (+/-1 °F)		
Humidity Range	30 to 80% (+/- 1	%)	
Max NG or LPG Capacity	300,000 Btu/hr		
AFUE Test Standard	ANSI 103 - 2007 Capable		
D	230V 3Ph Max Amps	200	
Power	460V 3Ph Max Amps	200	

Environmental Application Test Chamber		
Chamber Size	40 ft x 60 ft x 35 ft	high
Outside Temperature Test Range	0 °F to 140 °F (+/-1 °F)	
Humidity Range	30 to 80% (+/-1	%)
Max NG or LPG Capacity	4 million Btu/hr	
AFUE Test Standard	ANSI 103 — 2007 Capable	
Rain Testing Capability	8"/ per Hour Max	
Snow Testing Capability	2"/ per Hour Ma	ìΧ
Wind Testing Capability	50 mph Max	
Power	230V 3Ph Max Amps	783
	460V 3Ph Max Amps	391

Sound Test Chamber

	Sound Testing
Chamber Description	3 Chamber Configuration - Outside, Return and Supply
Equipment	 Brüel & Kjær Pulse LAN-XI Type I Sound Measurement System Capable of Measuring 10 Channels of Sound or Vibration Simultaneously Real Time measurement of 1/24 through 1/1 octave bands Narrow Band FFT Measurements Simultaneous testing for inlet, outlet and radiated sound with equipment under cooling or heating load
AHU & Packaged Unit Cooling Load	Up to 100,000 cfm and/or 300 tons
Chiller Sound Power Testing	Up to 540 tons
Pure Tone Qualified	45 Hz through 2,760 Hz
Test Standards	 Reference Sound Sources Comply with the requirements of ANSI S12.5 Satisfy the Acoustical Requirements Specified in AMCA 300, ANSI S12.51 (ISO 3741), AHRI 260, and AHRI 220
Outdoor Room Volume	106,326 cubic feet
Supply and Return Room Volume	51,765 cubic feet each



Twelve inch concrete walls isolate the 540 ton psychrometric test chamber for sound testing of equipment.



Open Testing Area (25,000 ft²)					
Description	Size	Description	Max Ceiling Height	Maximum Single Unit Test Width	Maximum Single Unit Test Length
Over/Under Rooftop Unit Testing Area	150 ft x 50 ft with 12 ft x 30 ft Floor Openings	 Up to 150 ton Capacity Ducts Through Floor — Bottom Discharge and Return Outside air duct connection available for exhaust and makeup air Four Testing Areas 	30 feet	12 feet	30 feet
Open Testing Area (Ground Floor)	320 ft x 80 ft	 Flexible Connections 24 Gas Testing Stations 36 million Btu/hr of natural gas service 1,200 Amps of electrical service Building Mock Up Testing 	55 feet	18 feet	100 feet

Test Gases and Capacities		
Natural Gas	Maximum Test Area Total Capacity — 60 million Btu/hr	
	$5-10,000 \mathrm{ft^3/hr}$ connections	
	11 – 4,000 ft ³ /hr connections	
LP Gas	Maximum Test Area Total Capacity — 10 million Btu/hr	
	1 – 10,000 ft ³ /hr connection	
	$7 - 4,000 \text{ft}^3/\text{hr connections}$	
Butane / Air Mixed Gas	600 ft³/hr	

Electrical Capabilities		
0-480V/3Ø Variable (Phase Balance)	900 amps Max	Multiple Power Connections
480V/3Ø Non-Variable Voltage	1200 amps Max	Multiple Power Connections
Airdon Tostina		

Airflow Testing		
4 Roll Around Airflow Test Tunnels	Up to 15,000 cfm	

Heating Test Standards Capabilities		
ANSI 103-2007	Method of Testing Annual Fuel Utilization Efficiency	
ANSI Z21.47-2016	Gas Fired Central Furnaces	
ANSI Z83.8 – 2016	Gas Unit Heaters, Gas Packaged Heaters, etc.	
ANSI Z83.4-2015	Non-Recirculating Direct Fired Gas Heaters	
ANSI Z83.18-2015	ANSI Z83.18-2015 — Recirculating Direct Fired Gas Heaters	
UL 1995 , UL 60335-1, UL- 60335-2-40	Standard for Safety — Heating and Cooling Equipment	



Open Testing Area and Psychrometric Chambers

Direct Fired Testing Capabilities		
Natural Gas	20 million Btu/hr Max	
Liquid Propane Gas	10 million Btu/hr Max	
Non-Recirculating And Recirculating	ANSI Z83.4-2015 and Z83.18-2015	
Combustion Instrumentation per ANSI Standards	300,000 Btu/hr	
Maximum Test Length	300 ft straight (longer with offset)	

Heating Testing Specialized Instrumentation		
Gas Calorimeter	NG or LPG	
Gas Combustion Meters		
Thermal Camera		
Data Recording	Portable Multi Channels DAQ's	

Cooling Test Standards Capabilities		
AHRI 210/240	Performance Rating of Unitary Air-Conditioning & Air-Source Heat Pump Equipment	
AHRI 340/360	Performance Rating of Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment	
ASHRAE 37	Methods of Testing for Rating Electrically Driven Unitary Air-Conditioning and Heat Pump Equipment	
ISO 13256	Water-Source Heat Pumps Testing and Rating for Performance: Water-to-Water and Brine-to-Water Heat Pumps	
ASHRAE 198	Method of Test for Rating DX-Dedicated Outdoor Air Systems for Moisture Removal Capacity and Moisture Removal Efficiency	
AHRI 410	Forced-Circulation Air-Cooling and Air-Heating Coils	
AHRI 870	Performance Rating of Direct Geoexchange Heat Pumps	
AHRI 390	Performance Rating of Single Package Vertical Air–Conditioners and Heat Pumps	
AHRI 365	Commercial and Industrial Unitary Air-Conditioning Condensing Units	
AHRI 550/590	Performance Rating of Water-chilling and Heat Pump Water-heating Packages Using the Vapor Compression Cycle	
AHRI 920	DX Dedicated Outdoor Air System Units	
UL 1995 , UL 60335-1, UI - 60335-2-40	Standard for Safety — Heating and Cooling Equipment	



For more information about scheduling testing contact your local AAON Representative

www.**AAON**.com/**RepSearch**



2425 S. Yukon Ave. Tulsa, OK 74107 www.AAON.com

Manufactured, Engineered, Headquartered, and Owned **in the U.S.A.**

It is the intent of AAON to provide accurate and current product information. However, in the interest of product improvement, AAON reserves the right to change pricing, specifications, and/or design of its product without notice, obligation, or liability. Copyright © AAON, all rights reserved throughout the world. AAON* and AAONAIRE* are registered trademarks of AAON, Inc., Tulsa, OK.